




GCL-M3/72GD

Bifacial Dual Glass
Cast Mono Module

370-405W

Cell Type

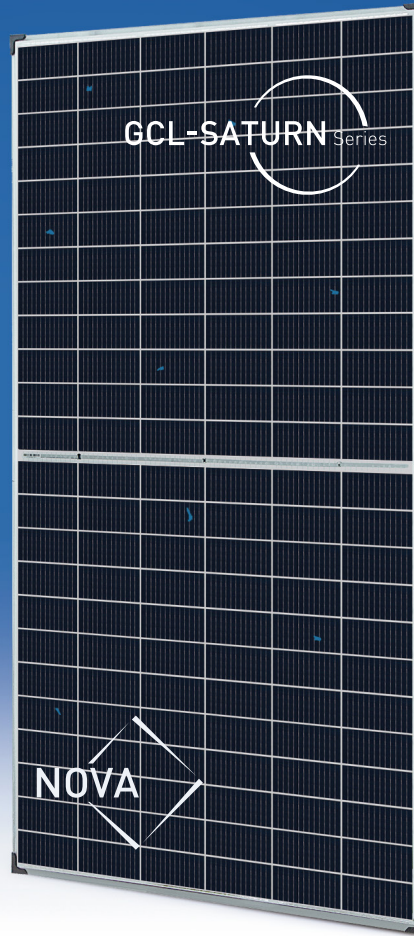

405W

Maximum Power Output

20.0%

Maximum Module Efficiency

0~+5W

Power Output Guarantee



Lower LID due to lower oxygen and carbon content



More evenly distributed soldering points and better reliability and lower hot spot risk



Selected encapsulating material and stringent production process control ensure the product is highly PID resistant and snail trails free



Additional safety, Fire class Acertified



Withstand up to 1500V system voltage effectively reduce BOS cost




Sand blowing test, salt mist test and ammonia test passed to endure harsh environments

GCL Delivers Reliable Performance Over Time

- World-class manufacturer of crystalline silicon photovoltaic modules
- Fully automatic facility and world-class technology
- Rigorous quality control to meet the highest standard: ISO9001:2015, ISO14001: 2015 and OHSAS: 18001 2007
- Tested for harsh environments (salt mist, ammonia corrosion and sand blowing test: IEC 61701, IEC 62716, DIN EN 60068-2- 68)
- Long term reliability tests
- 2x100% EL inspection ensuring defect-free modules

Linear Performance Warranty

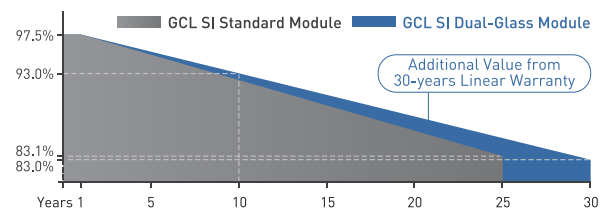

10 Years Product Warranty 30 Years Linear Power Warranty

* Please refer to GCL standard warranty for details

Additional Insurance Backed by Swiss RE



* Please refer to GCL for details

GCL-M3/72GD

Bifacial Dual Glass Cast Mono Module

370-405W

Electrical Specification (STC*)

Test Condition	Front	Rear	Front	Rear	Front	Rear	Front	Rear	Front	Rear	Front	Rear	Front	Rear	Front	Rear
Maximum Power P _{max} (W)	370	262	375	265	380	269	385	272	390	276	395	279	400	283	405	286
Maximum Power Voltage V _{mp} (V)	39.79	40.19	39.98	40.38	40.17	40.57	40.36	40.76	40.55	40.95	40.73	41.13	40.90	41.30	41.08	41.48
Maximum Power Current I _{mp} (A)	9.30	6.51	9.38	6.57	9.44	6.62	9.54	6.68	9.62	6.73	9.70	6.79	9.78	6.85	9.86	6.90
Open Circuit Voltage V _{oc} (V)	48.09	47.39	48.28	47.58	48.47	47.77	48.66	47.96	48.85	48.15	49.03	48.33	49.20	48.50	49.37	48.67
Short Circuit Current I _{sc} (A)	9.80	6.88	9.88	6.94	9.96	6.99	10.04	7.05	10.12	7.10	10.20	7.16	10.28	7.22	10.36	7.27
Module Efficiency (%)	18.2	12.9	18.5	13.1	18.7	13.2	19.0	13.4	19.2	13.6	19.5	13.8	19.7	13.9	20.0	14.1
Power Output Tolerance (W)	0~+5															

* Irradiance 1000W/m², Module Temperature 25°C, Air Mass 1.5

Electrical Specification (NOCT*)

Test Condition	Front	Rear	Front	Rear	Front	Rear	Front	Rear	Front	Rear	Front	Rear	Front	Rear	Front	Rear
Maximum Power P _{max} (W)	276.02	194.40	279.74	196.94	283.49	199.50	287.26	202.07	291.06	204.66	294.88	207.26	298.72	209.88	302.59	212.50
Maximum Power Voltage V _{mp} (V)	37.00	37.10	37.20	37.30	37.40	37.50	37.60	37.70	37.80	37.90	38.00	38.10	38.20	38.30	38.40	38.50
Maximum Power Current I _{mp} (A)	7.46	5.24	7.52	5.28	7.58	5.32	7.64	5.36	7.70	5.40	7.76	5.44	7.82	5.48	7.88	5.52
Open Circuit Voltage V _{oc} (V)	44.80	44.20	45.00	44.40	45.20	44.60	45.40	44.80	45.60	45.00	45.80	45.20	46.00	45.40	46.20	45.60
Short Circuit Current I _{sc} (A)	7.92	5.56	7.98	5.60	8.04	5.64	8.10	5.68	8.16	5.72	8.22	5.76	8.28	5.80	8.34	5.84

* Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

Mechanical Data

Number of Cells	144 Cells (6x24)
Dimensions of Module L*W*H (mm)	2030x1000x6mm (79.92x39.37x0.24 inches)
Weight (kg)	28.2 kg
Front Side Glass	High transparency solar glass 2.5mm (0.10 inches)
Back Side Glass	High transparency solar glass 2.5mm (0.10 inches)
J-Box	IP68 Rated
Cable	4.0mm ² (0.006 inches ²), length of +:200mm (7.87 inches), length of -:75mm (2.95 inches)
Number of diodes	3
Wind/ Snow Load	2400Pa/ 5400Pa*
Connector	MC Compatible

* For more details please check the installation manual of GCLSI

Temperature Ratings

Nominal Operating Cell Temperature (NOCT)	43±2°C
Temperature Coefficient of I _{sc}	+0.06%/°C
Temperature Coefficient of V _{oc}	-0.30%/°C
Temperature Coefficient of P _{MAX}	-0.38%/°C

Maximum Ratings

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Max Series Fuse Rating	20A

Optional

Connector: Original MC4

Packaging Configuration


Module per box	30 pieces
Module per 40' container	660 pieces




Contact Us for More Information

website: www.gclsi.com email: gclsisales@gclsi.com


Module Dimension

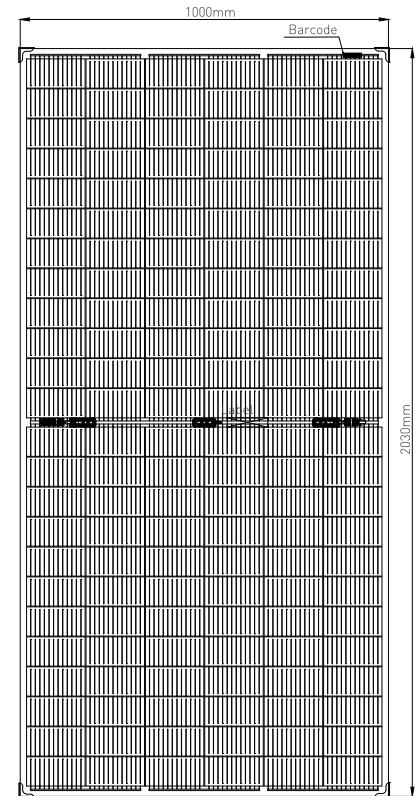


Back View



I-V Curve at Different Temperature (405W)

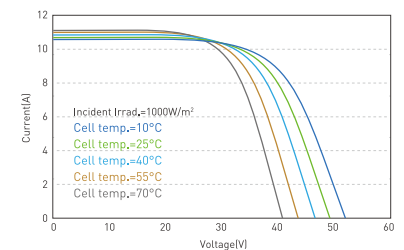

I-V/P-V Curve at Different Irradiation (405W)

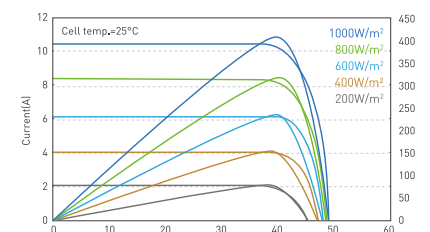

CAUTION: READ INSTALLATION MANUAL BEFORE USING THE PRODUCT