




GCL-M3/72GD

Bifacial Dual Glass Monocrystalline Module

375-410W

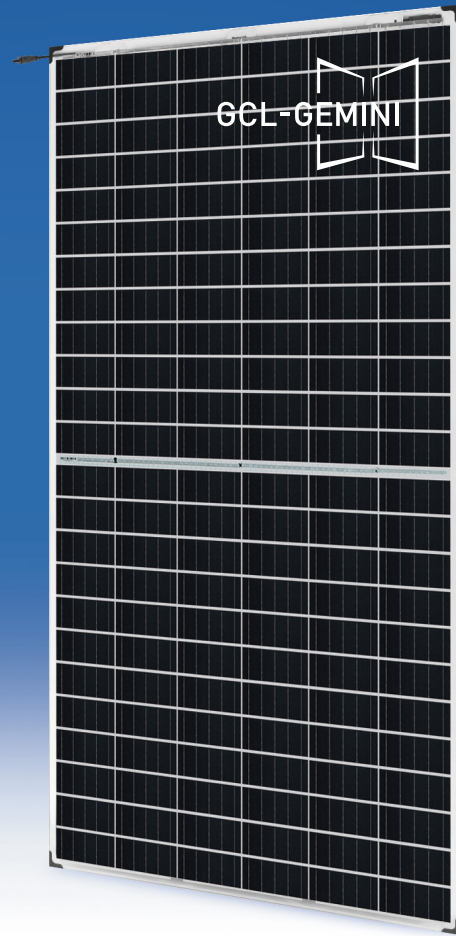

410W

Maximum Power Output

20.2%

Maximum Module Efficiency

0~+5W

Power Output Guarantee

Cell Type



Ideal choice for large scale ground installation



High conversion efficiency due to top quality wafers and advanced cell technology



Selected encapsulating material and stringent production process control ensure the product is highly PID resistant and snail trails free



Additional safety, Fire class Acertified



Withstand up to 1500V system voltage effectively reduce BOS cost




Sand blowing test, salt mist test and ammonia test passed to endure harsh environments

GCL Delivers Reliable Performance Over Time

- World-class manufacturer of crystalline silicon photovoltaic modules
- Fully automatic facility and world-class technology
- Rigorous quality control to meet the highest standard: ISO 9001, ISO 14001 and ISO 45001
- Tested for harsh environments (salt mist, ammonia corrosion and sand blowing test: IEC 61701, IEC 62716, DIN EN 60068-2- 68)
- Long term reliability tests
- 2x100% EL inspection ensuring defect-free modules

Linear Performance Warranty

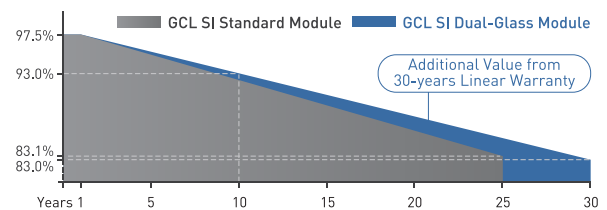

12 Years Product Warranty 30 Years Linear Power Warranty

* Please refer to GCL standard warranty for details

Additional Insurance Backed by Swiss RE



* Please refer to GCL for details

GCL-M3/72GD

Bifacial Dual Glass Monocrystalline Module

370-405W

Electrical Specification (STC*)

| Test Condition | | Front | Rear | Front | Rear | Front | Rear | Front | Rear | Front | Rear | Front | Rear | Front | Rear | | |
|------------------------|----------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Maximum Power | P _{max} (W) | 375 | 265 | 380 | 269 | 385 | 272 | 390 | 276 | 395 | 279 | 400 | 283 | 405 | 286 | 410 | 290 |
| Maximum Power Voltage | V _{mp} (V) | 39.98 | 40.38 | 40.17 | 40.57 | 40.36 | 40.76 | 40.55 | 40.95 | 40.73 | 41.13 | 40.90 | 41.30 | 41.08 | 41.48 | 41.25 | 41.65 |
| Maximum Power Current | I _{mp} (A) | 9.38 | 6.57 | 9.46 | 6.62 | 9.54 | 6.68 | 9.62 | 6.73 | 9.70 | 6.79 | 9.78 | 6.85 | 9.86 | 6.90 | 9.94 | 6.96 |
| Open Circuit Voltage | V _{oc} (V) | 48.28 | 47.58 | 48.47 | 47.77 | 48.66 | 47.96 | 48.85 | 48.15 | 49.03 | 48.33 | 49.20 | 48.50 | 49.37 | 48.67 | 49.54 | 48.84 |
| Short Circuit Current | I _{sc} (A) | 9.88 | 6.94 | 9.96 | 6.99 | 10.04 | 7.05 | 10.12 | 7.10 | 10.20 | 7.16 | 10.28 | 7.22 | 10.36 | 7.27 | 10.44 | 7.33 |
| Module Efficiency | (%) | 18.5 | 13.1 | 18.7 | 13.2 | 19.0 | 13.4 | 19.2 | 13.6 | 19.5 | 13.8 | 19.7 | 13.9 | 20.0 | 14.1 | 20.2 | 14.3 |
| Power Output Tolerance | (W) | | | | | | | | | | | | | | | 0~+5 | |

* Irradiance 1000W/m², Module Temperature 25°C, Air Mass 1.5

Electrical Specification (NOCT*)

| Test Condition | | Front | Rear | Front | Rear | Front | Rear | Front | Rear | Front | Rear | Front | Rear | Front | Rear | | |
|-----------------------|----------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Maximum Power | P _{max} (W) | 279.74 | 196.94 | 283.49 | 199.50 | 287.26 | 202.07 | 291.06 | 204.66 | 294.88 | 207.26 | 298.72 | 209.88 | 302.59 | 212.50 | 306.48 | 215.12 |
| Maximum Power Voltage | V _{mp} (V) | 37.20 | 37.30 | 37.40 | 37.50 | 37.60 | 37.70 | 37.80 | 37.90 | 38.00 | 38.10 | 38.20 | 38.30 | 38.40 | 38.50 | 38.60 | 38.70 |
| Maximum Power Current | I _{mp} (A) | 7.52 | 5.28 | 7.58 | 5.32 | 7.64 | 5.36 | 7.70 | 5.40 | 7.76 | 5.44 | 7.82 | 5.48 | 7.88 | 5.52 | 7.94 | 5.56 |
| Open Circuit Voltage | V _{oc} (V) | 45.00 | 44.40 | 45.20 | 44.60 | 45.40 | 44.80 | 45.60 | 45.00 | 45.80 | 45.20 | 46.00 | 45.40 | 46.20 | 45.60 | 46.40 | 45.80 |
| Short Circuit Current | I _{sc} (A) | 7.98 | 5.60 | 8.04 | 5.64 | 8.10 | 5.68 | 8.16 | 5.72 | 8.22 | 5.76 | 8.28 | 5.80 | 8.34 | 5.84 | 8.40 | 5.88 |

* Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

Mechanical Data

| | |
|---------------------------------|---|
| Number of Cells | 144 Cells (6×24) |
| Dimensions of Module L*W*H (mm) | 2030×1000×6mm (79.92×39.37×0.24 inches) |
| Weight (kg) | 28.2 kg |
| Front Side Glass | High transparency solar glass 2.5mm (0.10 inches) |
| Back Side Glass | High transparency solar glass 2.5mm (0.10 inches) |
| J-Box | IP68 Rated |
| Cable | 4.0mm ² [0.006 inches ²], Portrait: 200/200mm (7.87inches) |
| Number of diodes | 3 |
| Wind/ Snow Load | 2400Pa/ 5400Pa* |
| Connector | MC Compatible |

* For more details please check the installation manual of GCLSI

Temperature Ratings

| | |
|---|-----------|
| Nominal Operating Cell Temperature (NOCT) | 43±2°C |
| Temperature Coefficient of I _{sc} | +0.06%/°C |
| Temperature Coefficient of V _{oc} | -0.30%/°C |
| Temperature Coefficient of P _{MAX} | -0.38%/°C |

Maximum Ratings

| | |
|-------------------------|-----------|
| Operational Temperature | -40~+85°C |
| Maximum System Voltage | 1500V DC |
| Max Series Fuse Rating | 20A |

Optional

Connector: Original MC4

Packaging Configuration


| | |
|--------------------------|------------|
| Module per box | 30 pieces |
| Module per 40' container | 660 pieces |




Contact Us for More Information

website: www.gclsi.com email: gclsisales@gclsi.com


Module Dimension

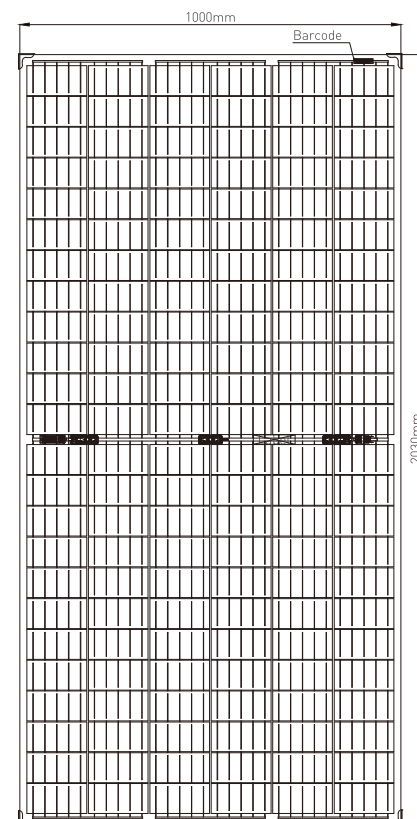


Back View



I-V Curve at Different Temperature (410W)

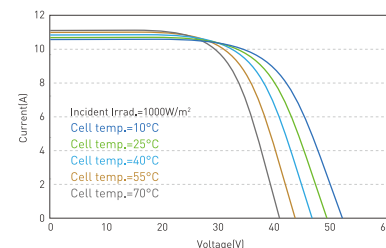

I-V/P-V Curve at Different Irradiation (410W)

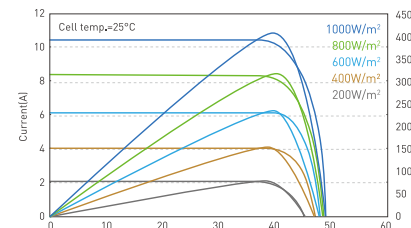

CAUTION: READ INSTALLATION MANUAL BEFORE USING THE PRODUCT